



Dimensions

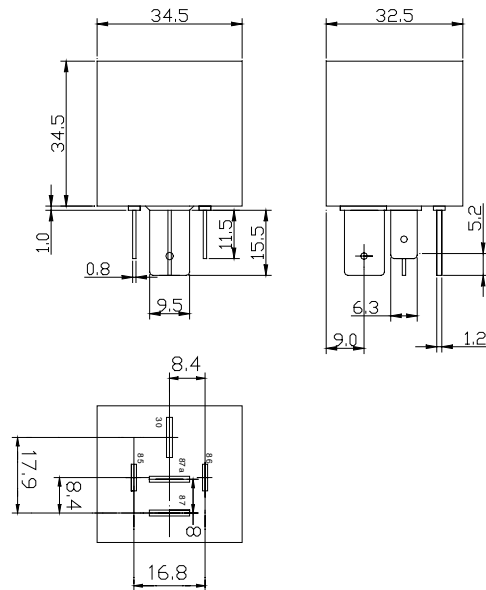

Terminal width Coil : 6.3mm; Contact : 9.5mm

Circuit Diagram



Nominal Coil Voltage: 24V
 Rated Load Current: 30/50A
 Contact Type: Change Over
 Enclosure Type: Dust Cover
 Contact Type: Plug In Type
 Power Consumption: 2.9W Approx.
 Coil Resistance: 195 Ohm +/- 10%
 Contact Arrangement: SPDT
 Contact Material: Silver Alloy
 Contact Resistance: 30mOhm Max.
 Switch Voltage: DC 75V Max.
 Operate Time (Initial): 10ms Max. Typical
 Release Time (Initial): 5ms Max. Typical
 Insulation Resistance: 100MOhm Min. (500V DC)
 Dielectric Strength: 500V AC (50Hz/min)
 Weight: 60g Approx.
 Vibration Resistance: 1.5mm Double Amplitude; 10-40Hz
 Ambient Temperature: -40°C to 85°C
 Humidity: 45-85% RH
 Operation Life Mechanical: 10,000,000
 Operation Life Electrical: 100,000 (At rated load)

				Date	Name	Heavy Duty Relays	Wittrin Electronic www.wittrin.com
			Author	21.12.09			
				Scale		HD-Relais Wechsler, 24V, 30/50A,	Part No.
							102 452 100
Index	Version	Date	Name				