


Dimensions

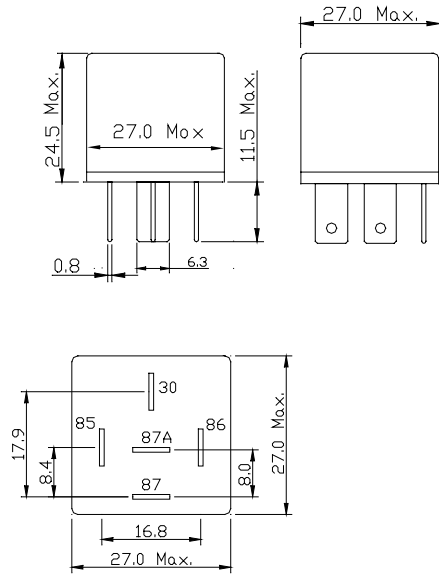

Nominal Coil Voltage: 12V

Rated Current: 133mA

Power Consumption: 1,6W

Coil Resistance: 90Ohm +/-10%

Switching Voltage: DC 75V

Feature: Sealed

Relays Type: Change over

Contact Material: Silver Alloy

Nominal Current: 30/40A

Operation Life Electrical: 100,000

Operation Life Mechanical: 1,000,000

Temperature Range: -40°C...+85°C


Pulling Time: ~7ms

Drop Out Time: ~5ms

Weight: 30g. approx.

Insulation Resistance: 100MOhm Min.(500V DC.)

Circuit Diagram



				Date	Name	Mini Relays	Wittrin Electronic www.wittrin.com
			Author	30.10.06			
				Scale		Relais Wechsler, 12V, 30/40A, vergossen	Part No.
							CU-242-C50
Index	Version	Date	Name				