



Dimensions

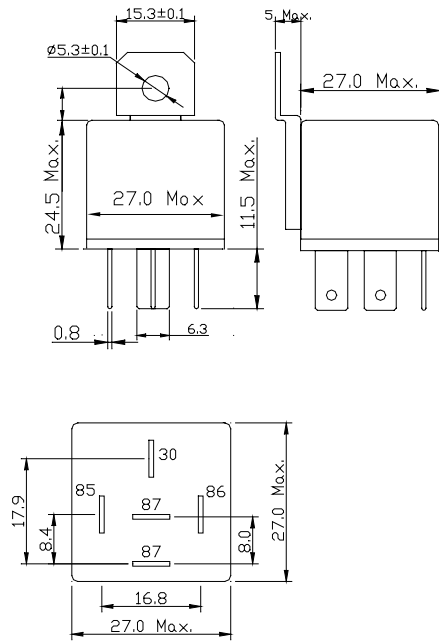

Nominal Coil Voltage: 24V
 Rated Current: 67mA
 Power Consumption: 1,6W
 Coil Resistance: 360Ohm +/-10%
 Switching Voltage: DC 75V
 Feature: Bracket, 2 x Pin87
 Relays Type: Normally open
 Contact Material: Silver Alloy
 Nominal Current: 20A
 Operation Life Electrical: 100,000
 Operation Life Mechanical: 1,000,000
 Temperature Range: -40°C...+85°C
 Pulling Time: ~7ms
 Drop Out Time: ~5ms
 Weight: 30g. approx.
 Insulation Resistance: 100MOhm Min.(500V DC.)

Circuit Diagram



| | | | | | | | |
|-------|---------|------|--------|----------|------|---|---------------------------------------|
| | | | | Date | Name | Mini Relays | Wittrin Electronic www.wittrin.com |
| | | | Author | 30.10.06 | | | |
| | | | | | | | |
| | | | | Scale | | Relais Wechsler, 24V, 20A, 2 x Klemme 87, Lasche | Part No. |
| | | | | | | | CU-430-N50-1 |
| Index | Version | Date | Name | | | | |